


INDUSTRIAL PRINTER B-EX6 SERIES

FLEXIBLE. DURABLE. RELIABLE.

The Toshiba B-EX6 series – redefining the Industrial printer marketplace. Combining market leading technology with usability, reliability and the lowest total cost of ownership. Rugged and durable design, advanced functionality, cost saving features and a wide choice of models and options for the best “all-in-one” industrial solution.

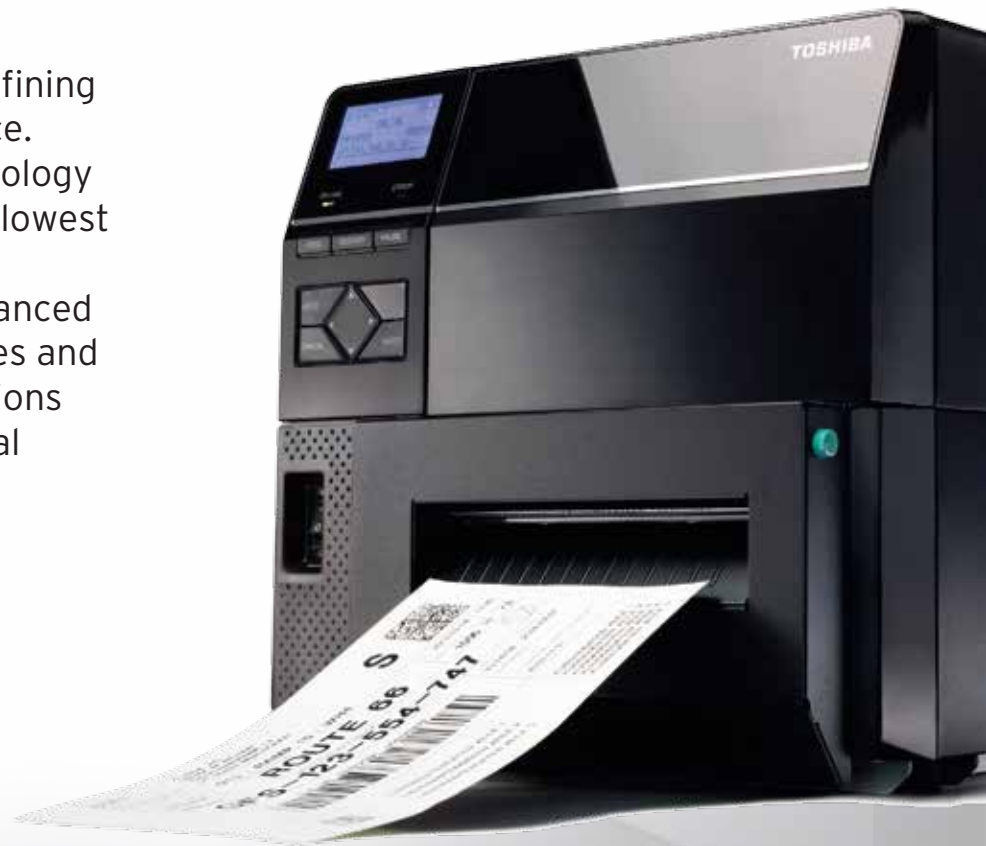

FEATURES

- Supporting 6 inch media, with speeds of up to 12 inches per second, the B-EX6 range can handle the most demanding printing applications.
- Designed with features and options to offer the lowest cost of ownership.
- Toshiba's unique ribbon save mode and an 800 m ribbon
- A bi-cover to reduce footprint and opening space and essential operator usability, for ease of operation, reduced maintenance costs and minimal down-time.
- A choice of models to suit any application, with 200 and 300 dpi variants for superior print quality and perfect readability of barcodes. Flat head and near edge head models enable easy replacement of legacy printer estates, and a wide range of media and options offer flexibility for any printing application.



INDUSTRIAL PRINTER B-EX6 SERIES

FLEXIBLE. DURABLE. RELIABLE.

	B-EX6T1	B-EX6T3
CHARACTERISTICS		
- Print Method	Direct thermal/Thermal transfer	
- Dimensions	331 (W) x 460 (D) x 310 (H) mm	
- Weight	20 kg	
- User Interface	Graphic LCD, 2 x LED, 10 x key	
- Operating Temp./Humidity	5°C to 40°C / 25-85% non-condensing relative humidity (RH)	
- Power Supply	AC 100 to 240V, 50/60 Hz	
PRINT		
- Resolution	203/305 dpi	
- Speed (max.) Up to	76/127/203/254/305 mm/second	
- Printhead	Near edge head	Flat head
- Print Width (max.)	160 mm	
- Print Length (max.)	1 490 mm	
RIBBON		
- Width	max. 170 mm	
- Length	max. 800 m	
MEDIA		
- Alignment	Centred	
- Media (backing paper) Width	50-165 mm	
- Label Thickness	0.13-0.17 mm	
- Media Shape	Roll, Fanfold	
- Inner Media Roll Diameter	40-76.2 mm	
- Outer Media Roll Diameter	200 mm	
SOFTWARE & CONNECTIVITY		
- Emulations	ZPL II	
- Printer Driver	Windows 10/8/7/Vista (32/64 bit), Windows Server 2012/Server 2008 (32/64 bit)	
- Host Interface	USB 2.0, LAN 10/100 Base, IPv6, USB Host/RTC, RS232, Centronics, Wireless LAN, EX I/O	
OPTIONS		
Disc cutter, Peel-off module, RS232, Centronics, Wireless LAN, EX I/O, RFID		

Please note: The specifications are subject to change without prior notice.
Please contact your sales representative for the latest update.

